



Item # \_\_\_\_\_

## Model 250

Vacuum Packaging Machine



**Model 250**

### Standard Features

- ▶ Tabletop model with a stainless steel housing and 15" (381 mm) x 14" (356 mm) x 4" (102 mm) single chamber.
- ▶ Single 12½" (318 mm) seal bar provides high integrity double sealing.
- ▶ High quality 6 m<sup>3</sup>/h Busch pump and vacuum dial gauge.
- ▶ 1-speed, ½ HP, totally enclosed, permanently lubricated ball bearings, thermally protected.
- ▶ Furnished in 115/60/1, 6.5 amp, AC.
- ▶ Vacuum intervals of 1 to 99 seconds.
- ▶ Simple to operate electronic, touch pad controls with nine storable programs.
- ▶ Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

### Features

Berkel Model 250 is a reliable tabletop vacuum package machine designed to meet most foodservice portion control and product storage needs. The unit offers a spacious stainless steel chamber, high quality pump and single 12½" seal bar providing a high integrity double seal. The unit is simple to operate and maintain.

<b>Approved By:</b> _____ <b>Date</b> _____
--

Berkel Company • 2006 Northwestern Parkway • PO Box 696 • Louisville, KY 40201  
800-348-0251 • FAX 888-888-2838 • [www.berkelequipment.com](http://www.berkelequipment.com)



Vacuum Packaging Machine **Model 250**

**Berkel****Model 250**

Vacuum Packaging Machine

Model No.	Chamber Size			Seal Bar	Seal Bar Length	Product Dimensions		
	Width	Depth	Height			Width A	Depth B	Height C
250	15" (381 mm)	14" (356 mm)	4" (102 mm)	1	12½" (318 mm)	16½" (419 mm)	21" (533 mm)	15½" (394 mm)

Model No.	Pump m³/h	Electrical	Weight	Box Dimensions		
				Width	Depth	Height
250	6	115/60/1	Net 158 lbs. (72 kg) Ship 218 lbs. (99 kg)	29" (737 mm)	22" (559 mm)	24" (610 mm)

**Specifications**

**Finish/Construction:** Tabletop model with stainless steel housing and chamber.

**Pump:** High quality 6 m³/h Busch pump and vacuum dial gauge.

**Electrical:** Furnished in 115/60/1, 6.5 amp, AC.

**Vacuum Chamber:** Single, stainless steel 15" (381 mm) x 14" (356 mm) x 4" (102 mm) chamber; vacuum intervals of 1 to 99 seconds.

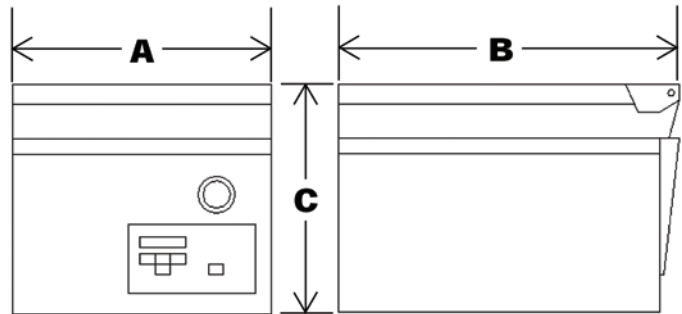
**Seal Bar(s):** Single, 12½" (318 mm) seal bar provides high integrity double sealing.

**Controls:** Simple to operate electronic, touch pad controls.

**Motor:** 1-speed, ½ HP, totally enclosed permanently lubricated ball bearings, thermally protected.

**Cord and Plug:** Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**Warranty:** All parts, service and travel coverage for one year, excluding wear items.

Vacuum Packaging Machine **Model 250****Berkel**

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

**Berkel Company • 2006 Northwestern Parkway • PO Box 696 • Louisville, KY 40201**  
**800-348-0251 • FAX 888-888-2838 • www.berkelequipment.com**