



STANDARD FEATURES

- DURABLE STAINLESS STEEL**
 Our reach-ins boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- ERGONOMICALLY DESIGNED DOORS WITH LOCKS**
 Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.
- MAGNETIC DOOR GASKET**
 Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- DIGITAL CONTROLLER**
 This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.
- HIGH DENSITY POLYURETHANE INSULATION**
 2-3/8 inches CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- EFFICIENT REFRIGERATION SYSTEM**
 Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -10°F, for single door, double door -8°F.
- BOTTOM MOUNT COMPRESSOR**
 Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- ALL BASIC PAN SIZES ACCEPTED**, including 18" x 26".
- DUAL PANE GLASS DOORS**
 "G" model units come with dual pane glass doors with aluminium frames and LED interior lights for better operation and efficiency.
- INCANDESCENT LIGHT & SWIVEL CASTERS**
 Solid door units come with interior incandescent and all units have 4" diameter swivel casters, front two with brakes.

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters / 6" Adjustable stainless steel legs / Factory reverse door hinging / 220V-50 cycles- 1 phase

Reach-ins REFRIGERATORS & FREEZERS

- ❑ ARR-23
- ❑ ARR-49
- ❑ ARR-72
- ❑ ARF-23 1G
- ❑ ARF-49-2G
- ❑ ARR-72 3G
- ❑ ARF-23
- ❑ ARF-49
- ❑ ARF-72



ARR-(F) 23



ARR-(F) 49



ARR-(F) 72




ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVs.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS			SHIPPING WT.	CUBES
		L	D	H*									
REFRIGERATOR													
ARR-23	1	23	3	5.6	1/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	301	51
ARR-49	2	49	6	6.9	1/3	115	5-15P	8'	55-1/2"	31"	79-1/2"	475	95
ARR-72	3	72	9	12.7	3/4	115	5-15P	8'	83-1/4"	31"	79-1/2"	665	155
ARR-23 1G	1	23	3	6.0	1/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	315	51
ARR-49 2G	2	49	6	7.3	1/3	115	5-15P	8'	55-1/2"	31"	79-1/2"	515	95
ARR-72 3G	3	72	9	12.7	3/4	115	5-15P	8'	83-1/4"	31"	79-1/2"	705	155
FREEZER													
ARF-23	1	23	3	8.5	3/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	325	51
ARF-49	2	49	6	12.9	1	115	5-15P	8'	55-1/2"	31"	79-1/2"	500	95
ARF-72	3	72	9	8.5	1-1/2	115/220	14-20L	8'	83-1/4"	31"	79-1/2"	685	155


*Height does not include 5" overall for casters




ARR-23 View




ARR-49 View




ARR-72 View

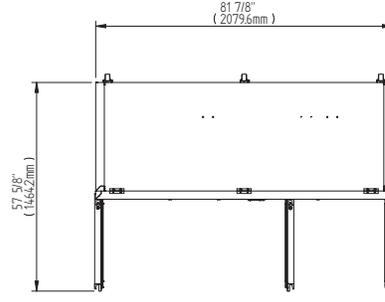


Top View

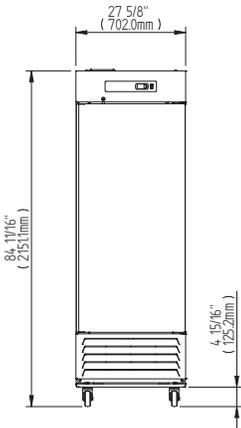


Top View

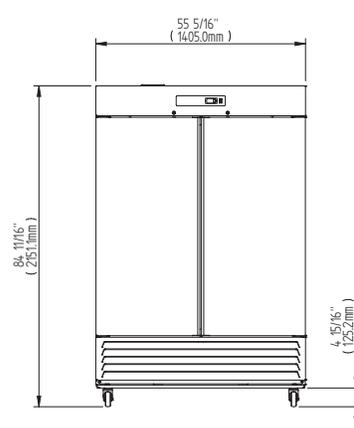

Top View

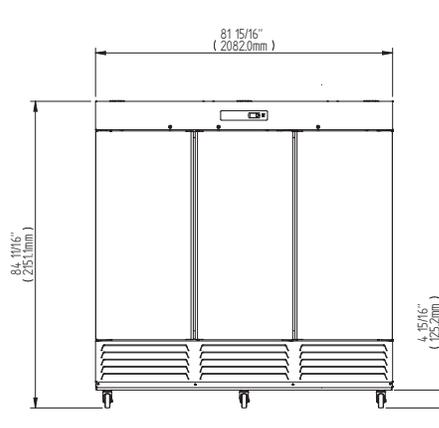

Common View

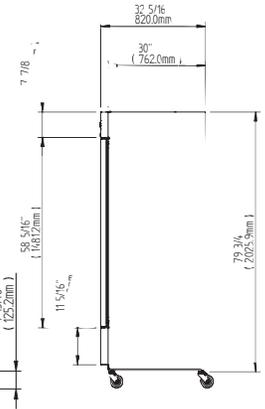

* Specifications



CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front with brakes.
- SHELVES: 3 Adjustable epoxy coated wire shelves per door.

DOORS

- Solid doors have stainless steel front and interior. "G" glass door models are dual pane with aluminium frame.
- Doors in step design gives added protection to the gasket.
- GASKETS: One piece construction magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A for 3 door Refrigerator.
- R-404A holding temperature at -10°F Freezers for single doors and -8°F on double doors.
- Self-contained capillary tube system using environmentally friendly refrigerant (CFC free).

- Bottom mount compressor with service friendly rail system.
- Evaporator coil is mounted in the rear of the unit with full accessibility from the back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

WARRANTY

- Continental USA & Canada:
- **One year** labor and parts warranty.
 - **Five year** compressor warranty.
 - **International:** one year parts only.