



Item # _____

Job _____

METRO® MOBILE END LOAD “KNOCK DOWN” RACKS

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Tubular framework with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slide assemblies for easy cleaning.
- **Versatile:** Slide assemblies can be replaced with slides of other than standard spacing while retaining the same framework.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Stable:** 5" (127mm) diameter, NSF-listed casters, corner-mounted for maximum stability.
- **Lightweight:** Easy to handle.
- **Rapid Cooling**

NOTE: Available factory set-up. See price list.



RT183N

NSF



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



End-Load “Knock-Down Racks”



13.70



END LOAD "KNOCK DOWN" RACKS

Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction on slide assemblies, tensilok fasteners for frame assembly.
- **End Frames:** 1" square x .093" (25x2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **Slides, 3" & 5" (75 & 127mm) Spacing:** .060"x1¹/₄"x1¹/₂" (1.5x32x38mm) profile, bulb-tipped extruded angle-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Slides, 1¹/₂" (38mm) Spacing:** .060"x1¹/₂"x1¹/₂" (1.5x12.7x38mm) bulb-tipped, extruded channel-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Castors:** Two HS5M on back — 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle. Two HS5MB on front — same as above with wheel brake. NSF listed.
- **Load Rating:** 20 lbs. (9kg) per level. Not to exceed 300 lbs. (159kg) per unit.

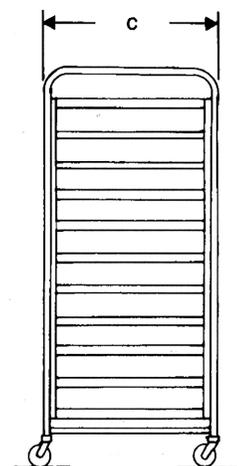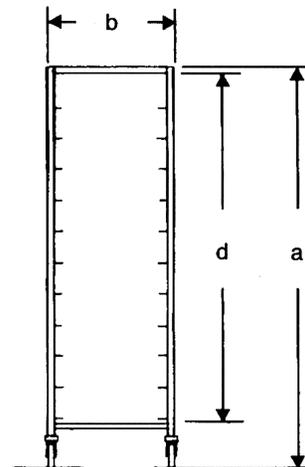

Dimensions

Cat. No.	(a) Height/Width/Depth (in.)		(c) (mm)		(d) Inside Height (in.) (mm)		Slide Spacing (in.) (mm)		Pan Capacity		Shipping Weight (lbs.) (kg)			
	(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(i)	(j)	(k)	(l)		
RT183N	64 ¹ / ₈	20 ³ / ₈	28	1630	520	710	55 ⁷ / ₈	1420	3	76	18	18x26	53	24
RT115N	64 ¹ / ₈	20 ³ / ₈	28	1630	520	710	55 ⁷ / ₈	1420	5	127	11	18x26	50	23
RT1334N	64 ¹ / ₈	20 ³ / ₈	28	1630	520	710	55 ⁷ / ₈	1420	1 ¹ / ₂	38	34	18x26	55	25

Accessories

Model No.	Description
SU	Factory Set-Up
A38	Gray Rubber Corner Bumpers

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Phone: 570-825-2741
 Fax: 570-825-2852

L02-081
 Printed in U.S.A. Rev. 6/10
 Information and specifications are subject to change without notice. Please confirm at time of order.
 Copyright © 2010 InterMetro Industries Corp.

For Product Information:
 U.S. and Canada: 1.800.992.1776

Latin America: 1.561.333.3824
 Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003
 Middle East/Africa: +971.4.811.8286