

VF1A-FS

One Section Full Solid Door Freezer

VALIANCE®

by  HOSHIZAKI

VF1A-FS
05/12/25
Item # 13734

W x D x H

26.88" x 32.00" x 81.70"
including 4" casters)



Dimensions / Capacity

One Section VF1A-FS

Interior Storage Capacity (CF) (AHAM)	19.07 ft³
Overall Width x Depth	26.88" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.25" x 52.31"
Depth with Door Open at 90°	57.87"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21.56" x 24.88"
Crated Shipping Weight	310 lbs
Crated Length x Depth x Height	33.50" x 28.75" x 83.88"

Electrical / Refrigeration

One Section VF1A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-4° to 4°F
Amperage	4.1
Energy Consumption (kWh/day) @ASHRAE	3.89
Approx. Nominal Compress. BTU/HR (HP)	1115
Refrigerant / Charge Amount (oz.)	R290 / (3oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time or temperature initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VR1A-FS

One Section Full Solid Door Refrigerator

VALIANCE®

by  HOSHIZAKI

VR1A-FS
05/12/25
Item #13735

W x D x H

26.88" x 32.00" x 81.70"
including 4" casters)



Dimensions / Capacity

One Section VR1A-FS

Interior Storage Capacity (CF) (AHAM)	19.07 ft³
Overall Width x Depth	26.88" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	26.54" x 52.31"
Depth with Door Open at 90°	57.87"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21.56" x 24.88"
Crated Shipping Weight	286 lbs
Crated Length x Depth x Height	33.50" x 28.75" x 83.88"

Electrical / Refrigeration

One Section VR1A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 42°F
Amperage	2.1
Energy Consumption (kWh/day) @ASHRAE	0.96
Approx. Nominal Compress. BTU/HR (HP)	1461
Refrigerant / Charge Amount (oz.)	R290 / (2.65oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VR1A-FS


One Section Full Solid Door Refrigerator

VALIANCE®


by  HOSHIZAKI

VR1A-FS
05/12/25
Item #13735


FRONT VIEW

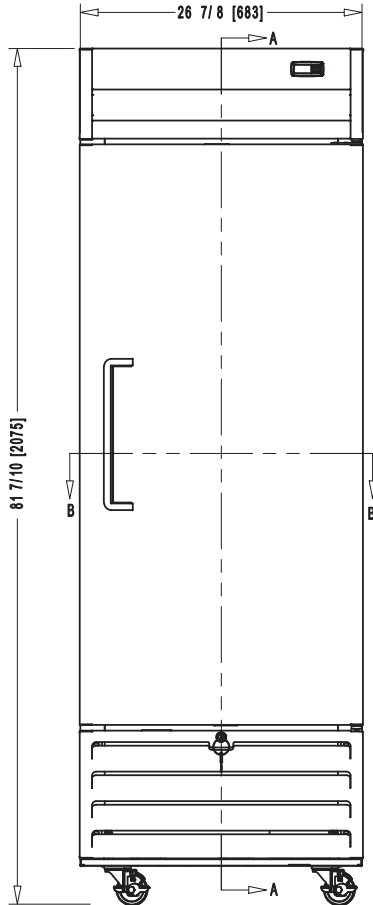

SIDE VIEW

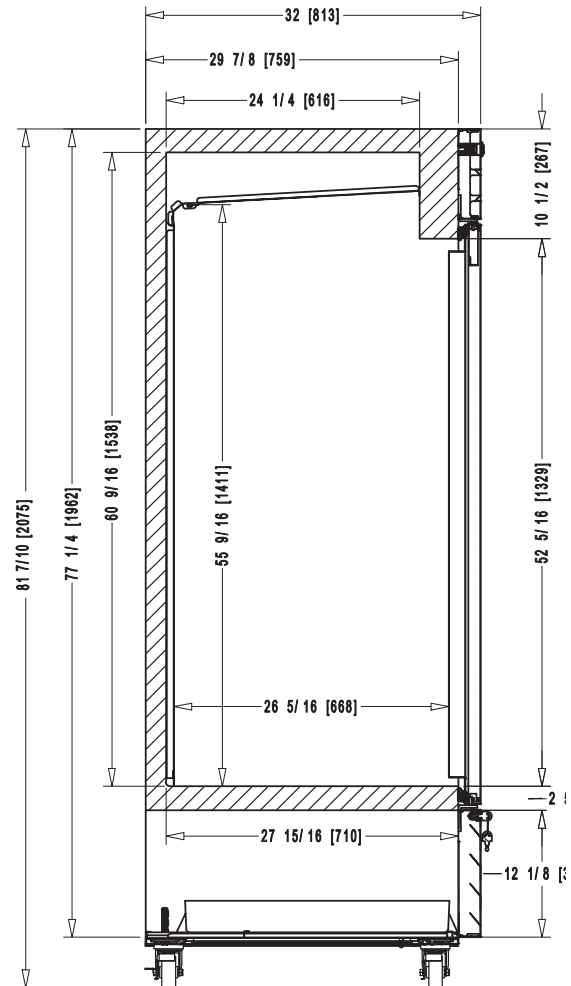

PLAN VIEW

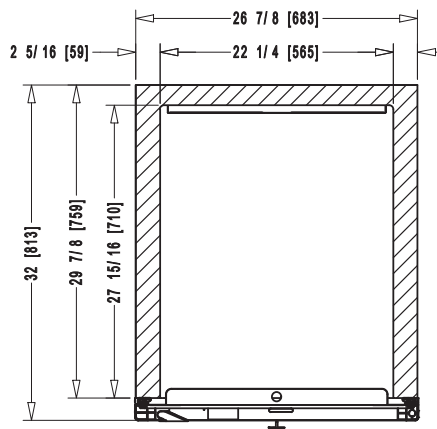

VF2A-FS

Two Section Full Solid Door Freezer

VALIANCE®

by  HOSHIZAKI

VF2A-FS
05/12/25
Item #13736

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)




Dimensions / Capacity

Two Section VF2A-FS

Interior Storage Capacity (CF) (AHAM)	42.45 ft ³
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	543 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Electrical / Refrigeration

Two Section VF2A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-4° to 4°F
Amperage	4.6
Energy Consumption (kWh/day) @ASHRAE	6.94
Approx. Nominal Compress. BTU/HR (HP)	1718(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.2oz)

Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time or temperature initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VF2A-FS


Two Section Full Solid Door Freezer

VALIANCE®


by  HOSHIZAKI

VF2A-FS
05/12/25
Item #13736


FRONT VIEW

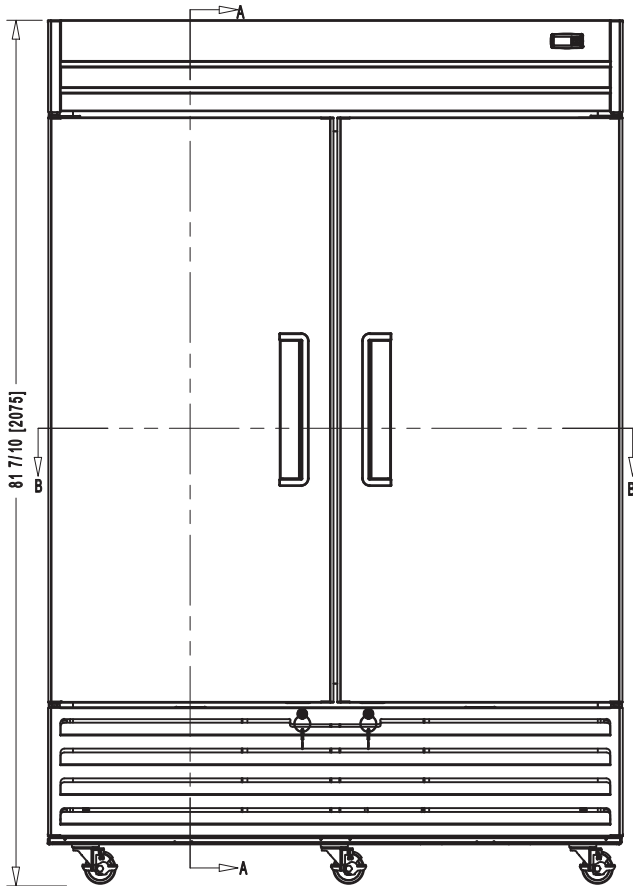

SIDE VIEW

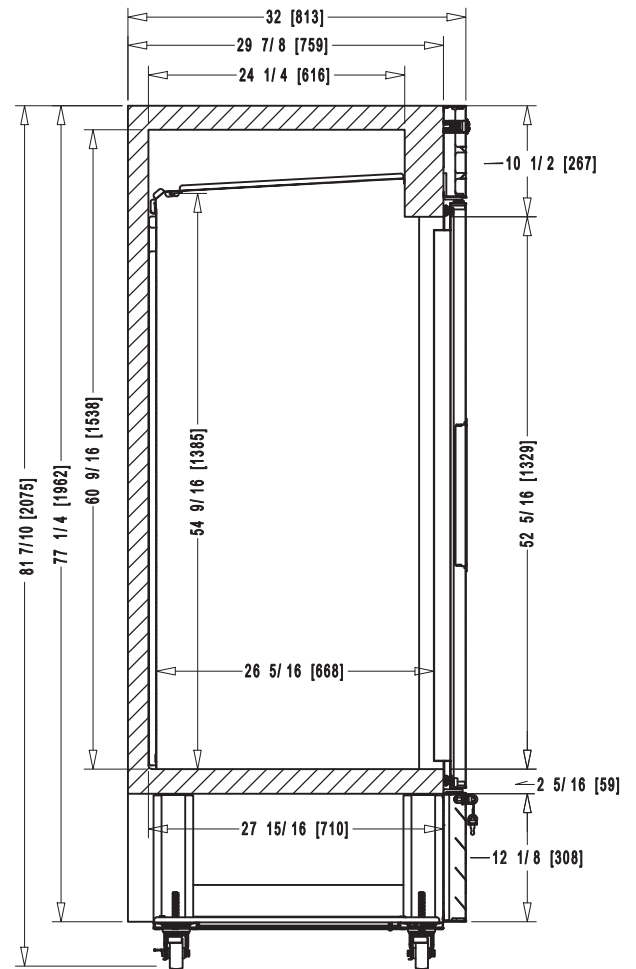

PLAN VIEW

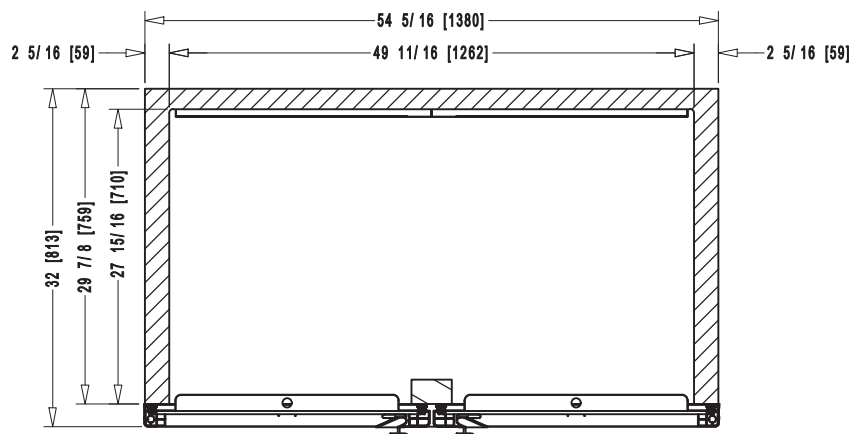

VR2A-FS

Two Section Full Solid Door Refrigerator

VR2A-FS
05/12/25
Item #13737

VALIANCE®

by  HOSHIZAKI

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)



Dimensions / Capacity

Two Section VR2A-FS

Interior Storage Capacity (CF) (AHAM)	42.45 ft³
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	471 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Electrical / Refrigeration

Two Section VR2A-FS

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 40°F
Amperage	3.5
Energy Consumption (kWh/day) @ASHRAE	1.48
Approx. Nominal Compress. BTU/HR (HP)	2322(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.1oz)

Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible - no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

Warranty


3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.


FRONT VIEW

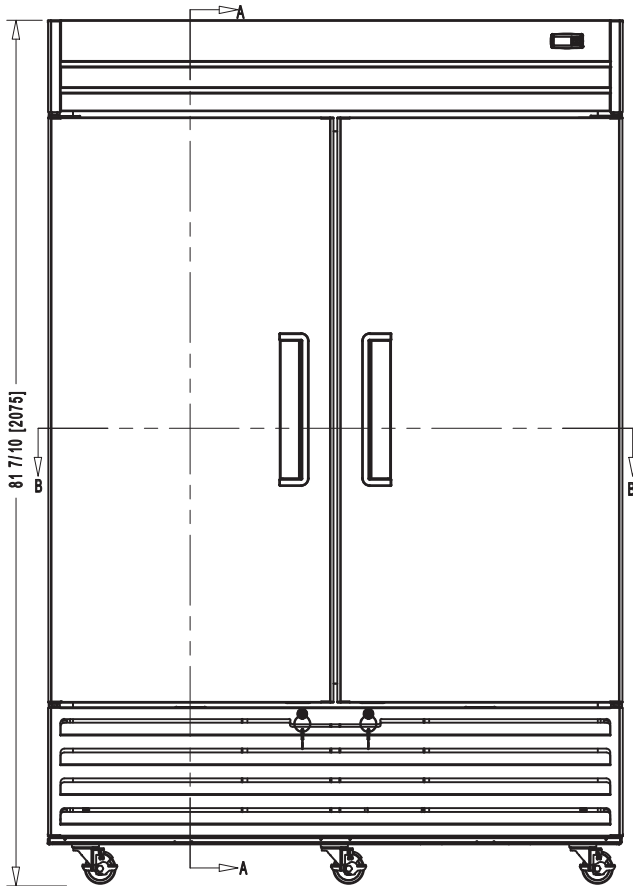

SIDE VIEW

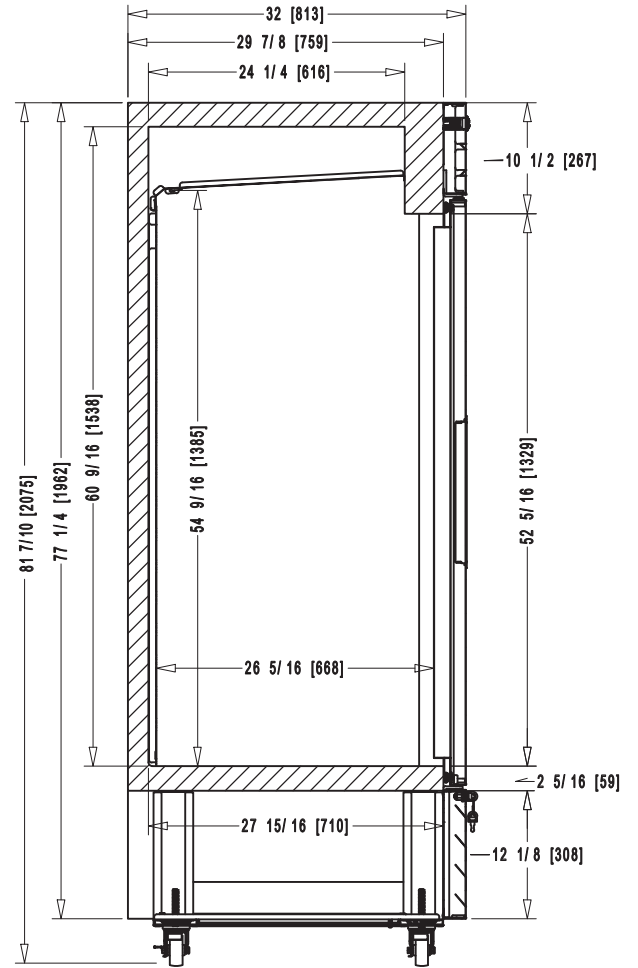

PLAN VIEW

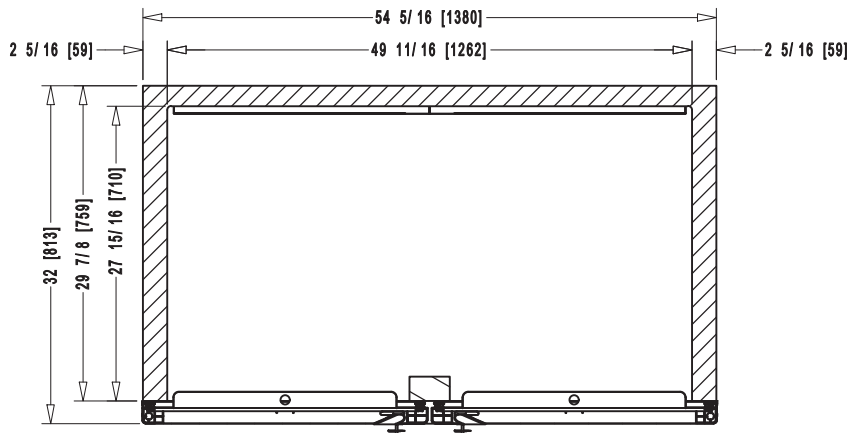

VUF27A/48A

Undercounter 27"/48" Freezer

VUF27A/48A
05/12/25
Item #13739

VALIANCE®

by  HOSHIZAKI

W x D x H

27" x 30" x 33.75"
(including 4" casters)



W x D x H

47.75" x 30" x 33.75"
(including 4" casters)



Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Engineered to maintain NSF-7 temperatures of 100° ambient
- Stainless steel exterior front, sides, and top
- Front breathing air flow design
- Environmentally friendly R290 hydrocarbon refrigerant
- Spring assisted self-closing doors with stay open feature
- Stainless steel exterior door(s)
- Field reversible doors
- Stainless steel interior floor with aluminum sides, rear, and top
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 1 per section. 105 lbs. capacity
- Aluminum shelf supports are adjustable in 1/2" increments
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:
VUF27A: 88
VUF48A: 46



Dimensions / Capacity

	One Section VUF27A	Two Section VUF48A
Interior Storage Capacity (CF) (AHAM)	6.33 ft ³	12.09 ft ³
Overall Width x Depth (including 1" bumper)	27" x 31.25"	47.75" x 31.25"
Height (including 4" casters)	33.75"	33.75"
Door Opening (W x H)	22.6" x 22.75"	19.5" x 22.75"
Depth with Door Open at 90°	55.75"	52.75"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Length x Depth x Height	33" x 29" x 37"	52" x 33" x 37"

Electrical / Refrigeration

	One Section VUF27A	Two Section VUF48A
Voltage	115/60/1	115/60/1
HACR Breaker	15.0 Amps	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡	5-15P ⚡
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Setpoint Range	-5° to 5°F	-5° to 5°F
Amperage	1.2	1.7
Energy Consumption (kWh/day) @ASHRAE	1.92	3.44
Approx. Nominal Compres. BTU/HR (HP)	993(1/5)	1468(1/3)
Refrigerant / Charge Amount (oz.)	R290 / (1.9oz)	R290 / (2.3oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.


VUF27A/48A

VALIANCE®


by  HOSHIZAKI

VUF27A/48A
05/12/25
Item #13739

FRONT VIEW

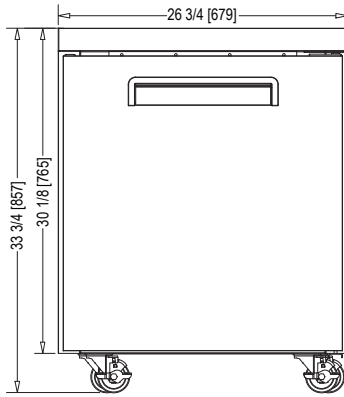


VUF27A

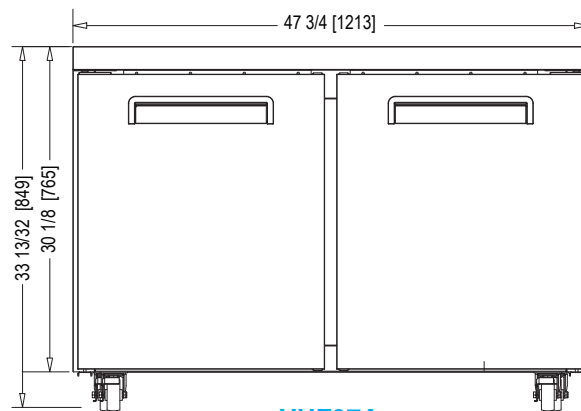


VUF48A

SIDE VIEW

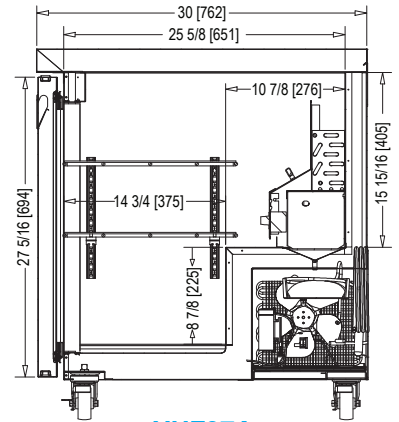


VUF27A

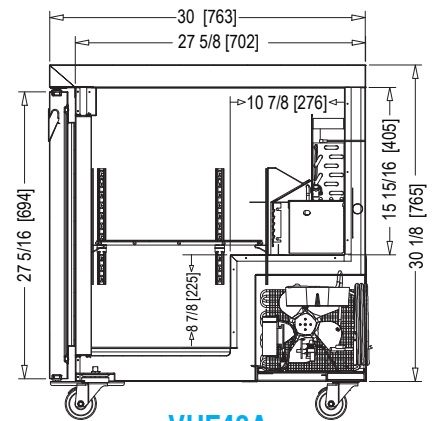


VUF48A

PLAN VIEW

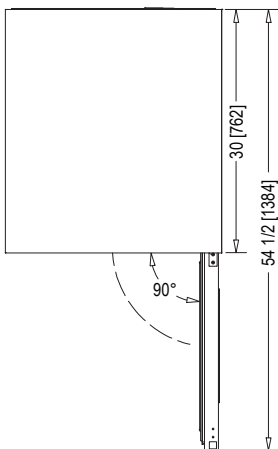


VUF48A

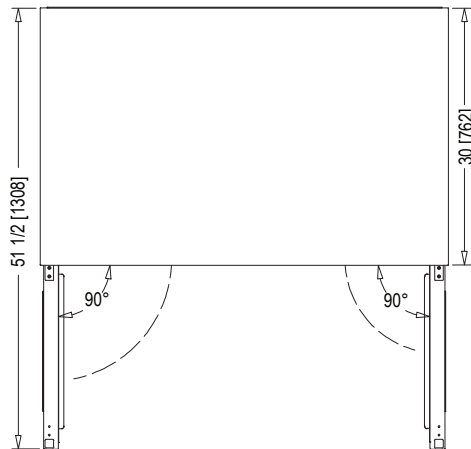


VUF48A

REAR VIEW

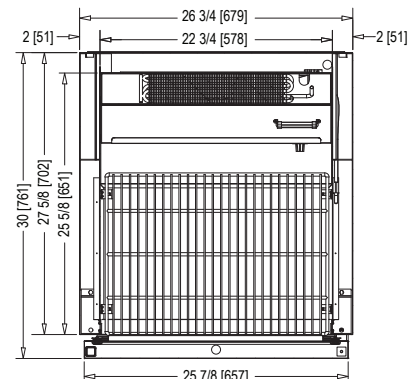

VUF27A

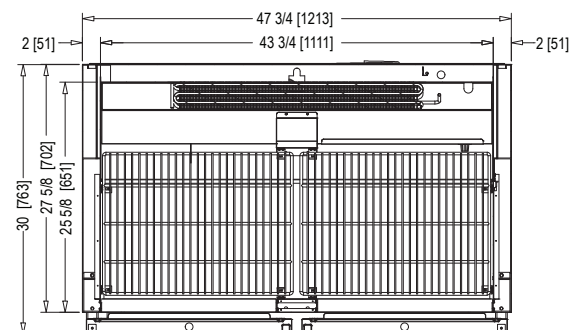

VUF48A

VUR27A/48A

Undercounter 27"/48" Refrigerator

VUR27A/48A
05/12/25
Item #13740

VALIANCE®

by  HOSHIZAKI

W x D x H

27" x 30" x 33.75"
(including 4" casters)



W x D x H

47.75" x 30" x 33.75"
(including 4" casters)



Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Engineered to maintain NSF-7 temperatures of 100° ambient
- Stainless steel exterior front, sides, and top
- Front breathing air flow design
- Environmentally friendly R290 hydrocarbon refrigerant
- Spring assisted self-closing doors with stay open feature
- Stainless steel exterior door(s)
- Field reversible doors
- Stainless steel interior floor with aluminum sides, rear, and top
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 1 per section. 105 lbs. capacity
- Aluminum shelf supports are adjustable in 1/2" increments
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:
VUR27A: 88
VUR48A: 46



Dimensions / Capacity

	One Section VUR27A-8	Two Section VUR48A-12
Interior Storage Capacity (CF) (AHAM)	6.33 ft ³	12.09 ft ³
Overall Width x Depth (including 1" bumper)	27" x 31.25"	47.75" x 31.25"
Height (including 4" casters)	33.75"	33.75"
Door Opening (W x H)	22.6" x 22.75"	19.5" x 22.75"
Depth with Door Open at 90°	54.5"	51.5"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Length x Depth x Height	33" x 29" x 37"	52" x 33" x 37"

Electrical / Refrigeration

	One Section VUR27A-8	Two Section VUR48A-12
Voltage	115/60/1	115/60/1
HACR Breaker	15.0 Amps	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡	5-15P ⚡
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Setpoint Range	33° to 39°F	33° to 39°F
Amperage	1.5	1.8
Energy Consumption (kWh/day) @ASHRAE	0.95	1.21
Approx. Nominal Compress. BTU/HR (HP)	1289(1/6)	1709(1/6)
Refrigerant / Charge Amount (oz.)	R290 / (1.9oz)	R290 / (2.5oz)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VUR27A/48A


Undercounter 27"/48" Refrigerator

VALIANCE®


by  HOSHIZAKI

VUR27A/48A
05/12/25
Item #13740

FRONT VIEW

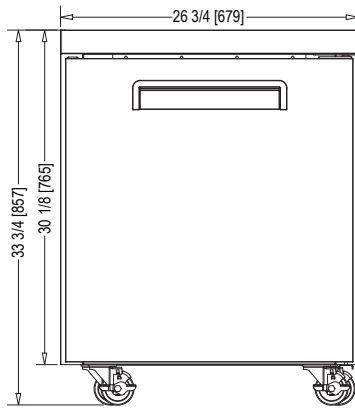


VUR27A

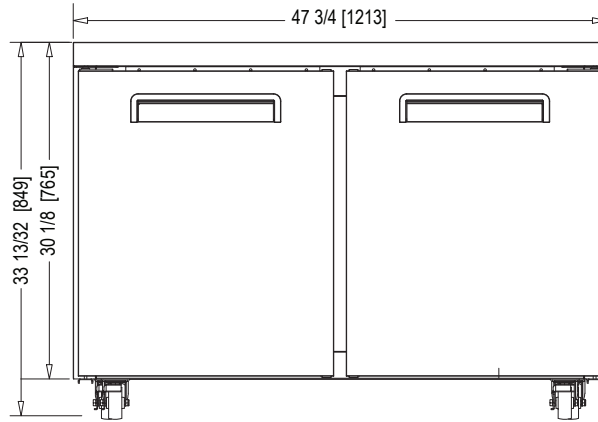


VUR48A

SIDE VIEW

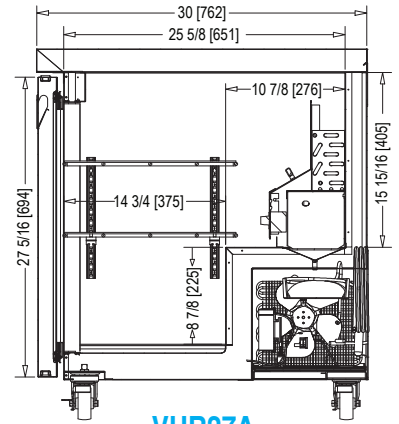


VUR27A

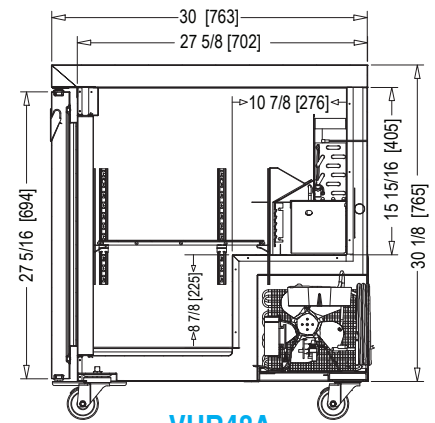


VUR48A

PLAN VIEW

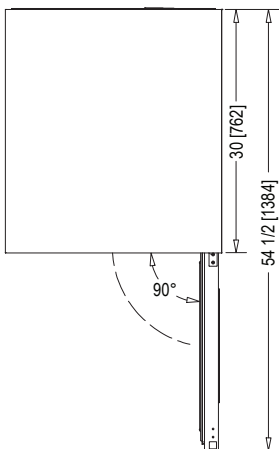


VUR48A

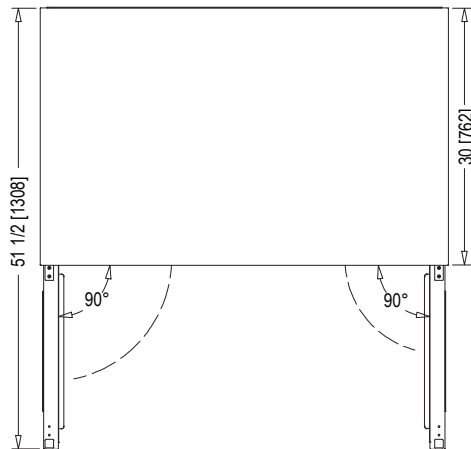


VUR48A

REAR VIEW

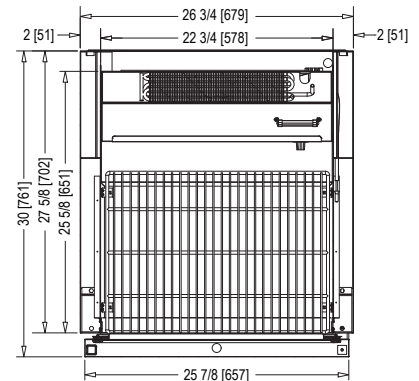

VUR27A

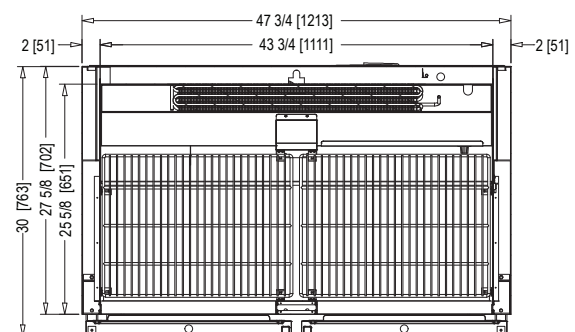

VUR48A

VSR27A-8/48A-12

Sandwich Top 27"/ 48" Prep Refrigerator

VALIANCE[®]
by  HOSHIZAKI

VSR27A-8/48A-12
05/12/25
Item #13738

W x D x H

26.75" x 30.13" x 40.69"
(including 4" casters)

W x D x H

47.75" x 30.13" x 40.69"
(including 4" casters)



Item #: _____
Project: _____
Qty: _____
AIA#: _____

FEATURES

- Engineered to maintain NSF-7 temperatures at 100°F ambient.
- Environmentally friendly R290 hydrocarbon refrigerant
- Prep-guard helps to prevent mess from dropping into the cabinet
- Stay-open door(s) is field reversible - no kit needed
- Stainless steel interior floor with aluminum sides, rear, and top
- Provided with full complement of polycarbonate plastic 1/6th size pans, 4" deep
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 105 lbs. capacity
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug

Dimensions / Capacity

One Section VSR27A-8

Two Section VSR48A-12

Interior Storage Capacity (CF) (AHAM)	6.33 ft ³	12.09 ft ³
Overall Width x Depth	26.75" x 30.13"	47.75" x 30.13"
Height (including 4" casters)	40.69"	40.69"
Door Opening (W x H)	22.75" x 22.88"	19.75" x 22.88"
Depth with Door Open at 90°	54.76"	51.76"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Length x Depth x Height	34.5" x 29.13" x 45.5"	52.13" x 34.5" x 45.5"

Electrical / Refrigeration

One Section VSR27A-8

Two Section VSR48A-12

Voltage	115/60/1	115/60/1
HACR Breaker	15.0 Amps	15.0 Amps
Electrical Connection (NEMA)	5-15P ⚡	5-15P ⚡
Voltage Range	103-127	103-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Setpoint Range	32.5° to 36.5°F	32.5° to 36.5°F
Amperage	2.1	3.3
Energy Consumption (kWh/day) @ASHRAE	1.89	2.16
Approx. Nominal Compres. BTU/HR (HP)	1461(1/6)	2130(1/6)
Refrigerant / Charge Amount (oz.)	R290 / (2.1oz)	R290 / (2.5oz)

Warranty

3 Year - Parts on entire machine.
4 Year - Labor on entire machine.
5 Year - Parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VSR27A-8/48A-12


Sandwich Top 27"/ 48" Prep Refrigerator

VALIANCE®


by  HOSHIZAKI

VSR27A-8/48A-12
05/12/25
Item #13738

FRONT VIEW

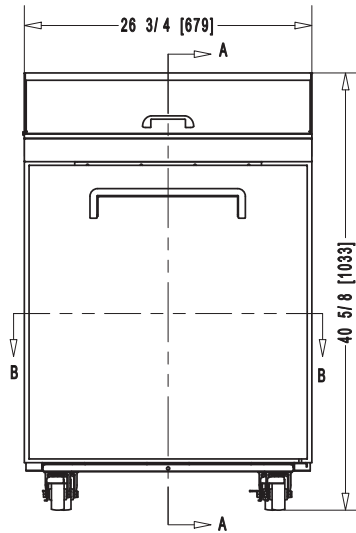


VSR27A-8

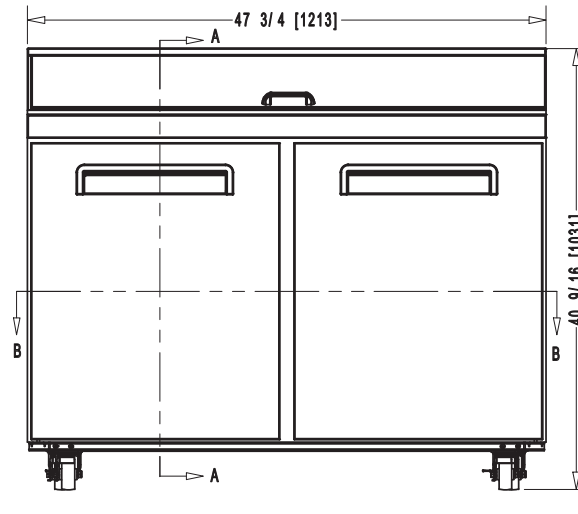


VSR48A-12

PLAN VIEW

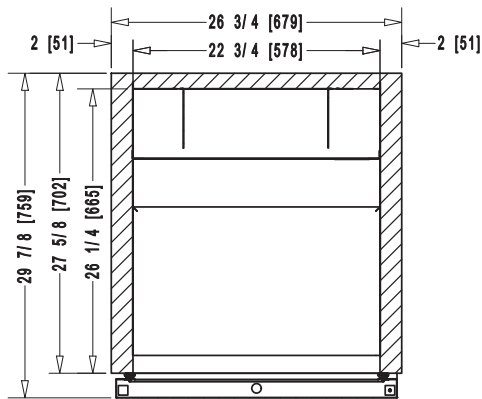


VSR27A-8

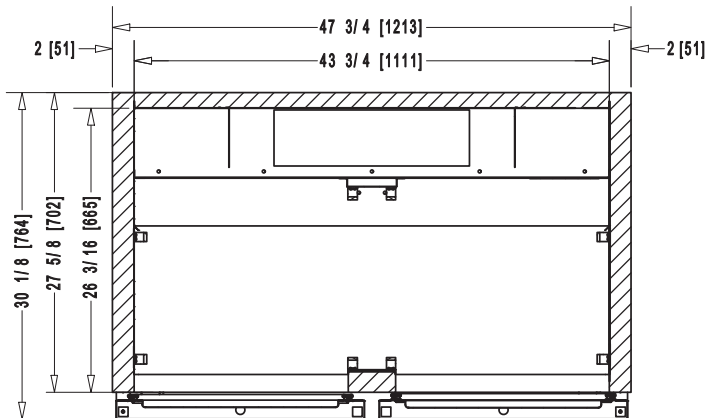


VSR48A-12

SIDE VIEW

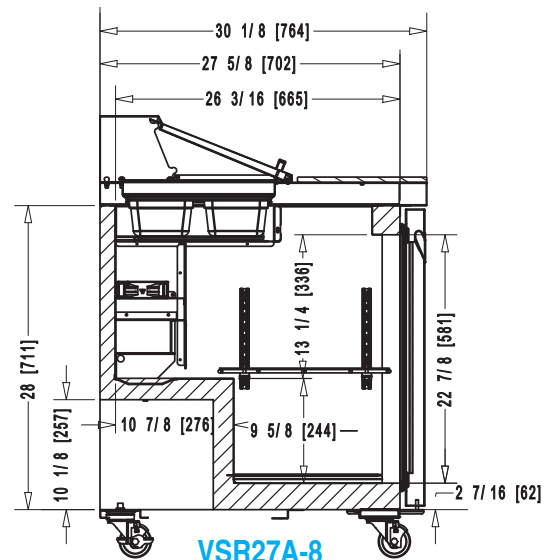

VSR27A-8

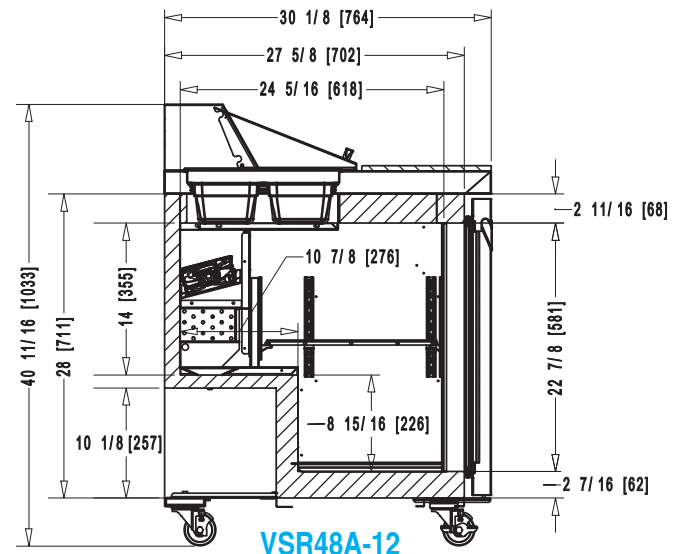

VSR48A-12